


PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

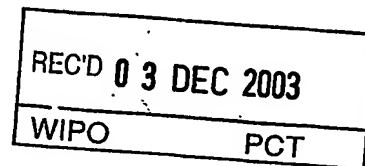

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



- (71) Sökande Tetra Laval Holdings & Finance SA, Pully CH
Applicant (s)
- (21) Patentansökningsnummer 0203693-7
Patent application number
- (86) Ingivningsdatum 2002-12-13
Date of filing

Stockholm, 2003-11-25

För Patent- och registreringsverket
For the Patent- and Registration Office

Lisa Junegren

Avgift
Fee

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

AWAPATENT AB

Kontor/Handläggare
Malmö/Nina Persson/BMS

TETRA LAVAL HOLDINGS &
FINANCE S.A.

Ansökningsnr Vår referens
SE-21001339

1

CONTROL OF STERILIZATION DEVICE

Technical Field of the Invention

The present invention relates to a device for sterilization in production of packages, which is adapted for sterilization with a gaseous sterilizing agent kept in the gaseous phase throughout the sterilization process, said device comprising a heating zone, a sterilization zone and a venting zone. The present invention also relates to a method of sterilizing packages in production of the packages, said packages having an open end and a closed end, wherein a gaseous sterilizing agent is used and kept in the gaseous phase throughout the sterilization process.

Background Art

Devices and methods of the above-mentioned kind are known in the art, e.g. from US-5 258 162. Here, packages are passed through a housing divided into zones. In the first zone, hot air is introduced for heating the packages. In the second zone, gaseous hydrogen-peroxide is introduced for sterilizing the heated packages. In the third and final zone, the packages are filled with sterile contents. The three zones are all contained in one housing and are not physically separated from each other. Therefore, it may be difficult to control the flow between the different zones.

EP-A-394 734 discloses another device and method for sterilizing objects. In the device and method described, a vertically displaceable hood is placed over the object to be sterilized. A negative pressure is produced in the hood and a sterilization gas is introduced. The fact that a displaceable hood is needed makes this device somewhat complex.

Summary of the Invention

An object of the present invention is to provide a device for sterilizing packages essentially of the type described above, but which enables an even safer sterilization process.

A specific object of the invention is to provide a device which allows improved control of the gas flow in and between the different zones.

Another object is to provide a device which allows improved control of the heating of packages.

It is also an object of the present invention to provide a method of sterilizing packages, which is improved as compared to prior art methods.

Yet another object is to provide a method which allows better control of the flow of air and gas in and between the different zones where the sterilization takes place.

According to the invention, these objects are achieved by a device of the kind mentioned by way of introduction, which has been given the characteristics of claim 1. Preferred embodiments of the inventive device are defined in dependent claims 2-19.

The above-mentioned objects are also achieved by a method as defined in claim 20, preferred variants thereof being defined in claims 21-35.

The inventive device for sterilization in production of packages comprises an ambient temperature sensor for sensing the ambient temperature outside the device, a concentration meter for measuring the concentration of sterilizing agent in the sterilization zone and a first control unit for controlling the amount of sterilizing agent introduced in the sterilization zone based on the temperature measured by the ambient temperature sensor and the concentration measured by the concentration meter. This makes it possible to achieve improved control of the sterilization process.

In a preferred embodiment, the device comprises means for maintaining a higher pressure in the sterilization zone than in the heating zone and venting zone. Thus, it is possible to ensure that any leakage of
 5 air and gas is from the sterilization zone towards the surrounding zones and not the other way round.

In one embodiment, the heating, sterilization and venting zones are separated from each other by means of partitionings having openings for the passage of packa-
 10 ges. This makes it easier to control the conditions in each zone.

The device is preferably adapted for sterilization with a gaseous sterilizing agent in the form of gaseous hydrogen peroxide. Hydrogen peroxide is a useful and
 15 reliable sterilizing agent.

The device is preferably adapted to sterilize packages before filling of the packages, said packages having an open end and a closed end. It is convenient to sterilize packages before filling them, since this makes
 20 it possible to maintain the sterility of sterile contents.

The heating zone may comprise means for heating the packages to a temperature above a dew point of the sterilizing agent used in the sterilization zone. In this
 25 way, it may be ensured that the sterilizing agent does not condensate on the packages.

In one embodiment, the venting zone comprises means for venting away the sterilizing agent used in the sterilization zone from the packages after sterilization.
 30 This makes it possible to ensure that the packages are free from sterilizing agent before filling.

The device may further comprise means for controlling a flow of gaseous sterilizing agent in the sterilization zone, such that the gaseous sterilizing agent
 35 flows essentially in a direction from the open end of the packages towards the closed end of the packages. This reduces the risk of recontamination of the packages.

The means for controlling the flow of gaseous sterilizing agent are preferably arranged to introduce the gaseous sterilizing agent in a top portion of the sterilization zone and to evacuate the gaseous sterilizing agent in a bottom portion of the sterilization zone, maintaining a flow of gaseous sterilizing agent essentially from top to bottom. This provides a secure way of maintaining a flow from the open end of the packages towards the closed end of packages standing on their closed end.

The device may further comprise means for controlling a venting air flow in the venting zone, such that the venting air flows essentially in a direction from the open end of the packages towards the closed end of the packages. Thus, the risk of recontamination of the sterilized packages may be reduced.

The means for controlling the flow of venting air are arranged to introduce the venting air in a top portion of the venting zone and to evacuate the venting air in a bottom portion of the venting zone, maintaining a flow of venting air essentially from top to bottom.

In one embodiment of the invention, the device comprises an ambient temperature sensor for sensing the ambient temperature outside the device. In this way, the heating in the heating zone may be controlled based on the ambient temperature.

Alternatively or additionally, the device may comprise a package heating temperature sensor for sensing the temperature of the packages entering the heating zone. This may also be used for controlling the heating.

In another embodiment, the device comprises an entry temperature sensor for sensing the temperature of the packages before entry into the sterilization zone. This is another way of enabling control of the heating in the heating zone.

In a preferred embodiment of the invention, the device comprises a feedback circuit for controlling the

heating in the heating zone based on the temperature of the packages. In this way, heating to a correct temperature may be ensured and over-heating of the packages may be avoided.

5 In another embodiment, the device further comprises a condensation detector for detecting condensation in the sterilization zone. Thus, it is possible to mark or discard packages that have been subjected to condensate.

The device of the invention is preferably adapted to
10 sterilize itself internally. Thus, sterile conditions in the device may be ensured in a simple manner.

For sterilizing itself, the device preferably comprises means for heating its interior. This allows efficient sterilization.

15 The inventive device may comprise a unit for production of the gaseous sterilizing agent, thus making the device self-supporting.

The device may further comprise a filling zone for filling vented packages, and means for maintaining a
20 higher pressure in the filling zone than in the venting zone. This makes it possible to further control the flow of air and gas in the device.

In the method according to the invention for sterilizing packages in production of the packages, said
25 packages having an open end and a closed end, a gaseous sterilizing agent is used and kept in the gaseous phase throughout the sterilization process. An ambient temperature and a concentration of sterilizing agent in a sterilization zone where sterilization is performed are
30 measured and used for controlling the amount of sterilizing agent introduced in the sterilization zone. This makes it possible to achieve improved control of the sterilization process.

In a preferred variant of the method, a positive
35 pressure is maintained in the sterilization zone in which the sterilization is performed.

Gaseous hydrogen peroxide is preferably used as sterilizing agent. This is a well-known and reliable sterilizing agent.

5 In a variant of the method, the packages are passed into a heating zone where they are heated to a temperature above the dew point of the sterilizing agent. This makes it possible to ensure that the sterilizing agent does not condensate on the packages.

10 The heated packages may be passed through an opening in a partitioning separating the heating zone and the sterilization zone into the sterilization zone, where they are subjected to the gaseous sterilizing agent. Since the package has to be passed through a partitioning for entering the sterilization zone, it is easier to
15 control the conditions for sterilization.

Analogously, the sterilized packages may be passed through an opening in a partitioning separating the sterilization zone and a venting zone into the venting zone, where they are subjected to hot sterile air for
20 venting away the sterilizing agent. Thus, the packages may be subjected to distinctly different conditions during sterilization and venting.

The gaseous sterilizing agent in the sterilization zone preferably flows essentially in a direction from the
25 open end of the packages towards the closed end of the packages. Thus, the risk of recontamination of packages may be reduced.

The gaseous sterilizing agent may be introduced in a top portion of the sterilization zone and evacuated in a
30 bottom portion of the sterilization zone, so that a flow of sterilizing agent essentially from top to bottom is maintained. This is a simple way of maintaining a suitable flow for packages standing on their closed end.

In one variant of the method, the venting air in the
35 venting zone flows essentially in a direction from the open end of the packages towards the closed end of the

packages. As in the case in the sterilization zone, this reduces the risk of recontamination of packages.

The venting air is preferably introduced in a top portion of the venting zone and evacuated in a bottom portion of the venting zone, so that an air flow essentially from top to bottom is maintained. This is a simple manner of ensuring a suitable flow for packages standing on their closed end.

In a preferred variant of the method, the gaseous sterilizing agent is produced by addition of liquid sterilizing agent to hot air. Thus, the sterilization process may simply and reliably be provided with gaseous sterilizing agent.

An ambient temperature and a concentration of sterilizing agent in the sterilization zone may be measured for controlling the amount of sterilizing agent introduced the sterilization zone.

An ambient temperature may be measured and used for controlling the heating in the heating zone, thus improving control of the sterilization process.

In a variant of the method, a temperature of the packages entering the heating zone is measured and used for controlling the heating in the heating zone. This is an alternative or additional manner of controlling the conditions for the sterilization process.

Further, a temperature of the packages just before they are passed into the sterilization zone may be measured and used for controlling the heating in the heating zone. This is another convenient way of controlling the conditions for the sterilization process.

In one variant of the method of the invention, the temperature and flow of air for production of the gaseous sterilizing agent is controlled based on detection of condensation in the sterilization zone. This makes it easier to avoid condensation.

A higher pressure is preferably maintained in a filling zone for filling vented packages than in the

venting zone. Thus, control of flow between the different zones may be improved.

Brief Description of the Drawings

The invention will be described in more detail with reference to the appended schematic drawings, which show an example of a currently preferred embodiment of the invention.

Fig. 1 is a diagram showing the principles of the sterilizing device of the invention.

Fig. 2 is a perspective view of the sterilizing device.

Detailed Description of Preferred Embodiments

With reference to Fig. 1, the sterilization device 1 has a heating zone 2, a sterilization zone 3, a venting zone 4 and connected thereto a filling zone 5. As may be seen from Fig. 2, the zones 2-5 are separated from each other by partitionings 6-7. In each partitioning 6, 7 there is an opening 6a, 7a. Packages 8 are arranged in holders 9 on a conveyor belt 10 which passes through the zones 2-5. The packages 8 stand on their closed top end 11 with their open bottom end 12 directed upwards.

In the heating zone 2 there are nozzles 13 in a top portion 14 for introduction of hot sterile air. In a bottom portion 15 of the heating zone 2 there are outlets 16 for withdrawing the hot air.

Similarly, there are nozzles 17 for introduction of gaseous hydrogen peroxide in a top portion 18 of the sterilization zone 3. In a bottom portion 19 of the sterilization zone there are outlets 20 for withdrawing hydrogen peroxide.

The venting zone 4 also has nozzles 21 for introducing hot sterile air in a top portion 22. In a bottom portion 23 of the venting zone 4 there are outlets 24 for withdrawing hot air.

The sterilizing device has a gas production unit 25 for producing the gaseous hydrogen peroxide used for sterilization.

In a manner similar to the heating, sterilization and venting zones 2-4, the filling zone 5 has nozzles 26 for introducing sterile air in a top portion 27 of the filling zone.

5 Included in the device 1 is further a catalyst unit 28 for degrading hydrogen peroxide gas withdrawn from the sterilization zone 3.

The method by which packages are treated in this device 1 will now be described. A package 8 standing on
10 its closed top end 11 in one of the holders 9 is transported by the conveyor belt 10 into the heating zone 2. Here, sterile air with a temperature of approximately 140 °C is introduced in the top portion 14 by means of the nozzles 13. In this manner the package 8 is heated to
15 a temperature above the dew point of the gaseous sterilizing agent to be used in the sterilization zone 3. Thus, it may be ensured that hydrogen peroxide does not condense on the package 8. The temperature to which the package 8 should be heated depends on the content of
20 hydrogen peroxide in the sterilizing gas, but is normally approximately 70 °C.

Since the heating air is introduced in the top portion 14 of the heating zone 2 and withdrawn through the outlets 16 in the bottom portion 15, an air flow
25 essentially from top to bottom of the heating zone 2 is ensured. Thus, it is also ensured that air flows past the package 8 from the open end 11 towards the closed end 12. This one-way air flow reduces the risk of particles and micro organisms whirling about in the heating zone 2.

30 Heating in the heating zone 2 is controlled based on a temperature measured on the inside of the package 8 by means of a package heating temperature sensor 31, e.g. an IR temperature sensor. This package heating temperature sensor 31 may also be used in a feed-back circuit
35 providing a safety device for the heating. If, for instance, the conveyor belt 10 transporting the packages is stopped, continued heating in the heating zone 2 might

lead to melting of e.g. plastic lids on the packages 8. Therefore, if a predetermined high temperature is measured by the inside temperature sensor, hot air will be by-passed via a shunt, thus not raising the temperature in the heating zone further. When a predetermined low temperature is measured, heating in the heating zone 2 recommences. The predetermined high and low temperature levels are determined based on the properties of the material in the packages 8 and on the hydrogen peroxide content of the sterilizing gas.

The heated package 8 is passed by the conveyor belt 10 through the opening 6a in the partitioning or semi-open wall 6 into the sterilization zone 3. Here, the package 8 is subjected to gaseous hydrogen peroxide introduced at a temperature of approximately 95 °C in the top portion 18 via the nozzles 17. The hydrogen gas is withdrawn through the outlets 20 in the bottom portion 19 and therefore a one-way gas flow is maintained from the top of the sterilization zone 3 towards the bottom. This also means that the flow past the packages 8 is directed from the open end 12 towards the closed end 11. This reduces the risk of recontamination of the packages 8.

Further, an accurate sterilization may be achieved both of the inside and the outside of the package 8. Sterilization of the inside of the package 8 is essential in order to maintain sterility of sterile contents subsequently filled in the package 8. Sterility of the outside of the package improves manageability of the package 8, since the package 8 may be displaced vertically for moving towards and away from an injection nozzle during filling of the package 8 without the risk of particles or micro organisms on the outside of the package 8 contaminating the inside.

Gaseous hydrogen peroxide is introduced and withdrawn at such rate that a positive pressure is maintained in the sterilization zone 3. Thus, it may be ensured that any leakage of gas and air between the sterilization zone

3 and the surrounding heating and venting zones 2, 4 is from the sterilization zone 3 towards the surrounding zones 2, 4. This improves the conditions for an accurate sterilization. Approximately 20 % of the gas leaving the sterilization zone 3 will seep into the heating and venting zones 2, 4, the remaining 80 % being withdrawn through the outlets 20.

The sterilizing gas used in the sterilization zone 3 is produced in the gas production unit 25 by addition of liquid hydrogen peroxide to hot sterile air. The desired hydrogen peroxide concentration in the sterilizing agent may be adjusted by adjustment of the proportion of liquid hydrogen peroxide added to the air. In the example shown, a sterilizing gas containing approximately 35 % hydrogen peroxide is used for sterilization of packages.

Gas withdrawn through the outlets 20 in the bottom portion 19 of the sterilization zone 3 is passed through the catalyst unit 26 for removing hydrogen peroxide from the gas before being evacuated through the evacuation system of the device 1.

The fact that the package 8 is heated above the dew point of the hydrogen peroxide gas before entry into the sterilization zone 3 ensures that hydrogen peroxide does not condensate on the package 8. Therefore, removal of hydrogen peroxide from the package through venting in the venting zone 4 is facilitated. This allows a reliable sterilization even of packages with difficult geometries, e.g. with crevices and pores, without the risk of high residuals of hydrogen peroxide on the package 8 to be filled with an edible content.

The sterilized package 8 is passed through the opening 7a in the partitioning or semi-open wall 7 into the venting zone 4. In the venting zone 4, sterile air is introduced via the nozzles 21 in the top portion 22 at a temperature of approximately 70 °C. The venting air vents away hydrogen peroxide remaining in and on the package 8. Venting is facilitated by the fact that the heating of

the package 8 has eliminated condensation of hydrogen peroxide on the package.

The package 8, now sterilized and essentially free from residual hydrogen peroxide, is passed into the filling zone 5 where it is filled with a sterile content, e.g. milk, juice or tomato paste. In order to ensure an air flow essentially from top to bottom, thus minimizing the risk of recontamination of the package 8, sterile air is introduced via the nozzles 26 in the top portion 27 of the filling zone 5. A positive pressure is maintained in the filling zone 5, such that air flow is from the filling 5 outwards and not the other way round.

The filled package 8 is then transported on for sealing and folding of the bottom.

The partitionings between the different zones 2-5 make it possible to control the conditions in each separate zone 2-5 and to control the flow between zones 2-5.

When a production run is finished or when a new run is to begin, the device itself needs to be sterilized. Hot sterile air is then introduced via the nozzles 13 in the heating zone 2 and the inside of the device 1 is heated to approximately 35 °C. When the interior has reached the appropriate temperature, gaseous hydrogen peroxide is introduced in the entire device via the nozzles 17 in the sterilization zone 3. The flow pattern will be different during machine sterilization, i.e. sterilization of the interior of the device 1, as compared to during package sterilization, since the entire interior is to be heated and sterilized. As with package sterilization, sterilizing gas is withdrawn via the catalyst unit 26 for destruction of the hydrogen peroxide.

The sterilization process in the device of the invention is controlled by means of three control loops. In the first control loop, an ambient temperature sensor 27 measures the temperature outside the device 1 and a

relative humidity sensor 28 measures the relative humidity outside the device. A concentration meter 29 measures the hydrogen peroxide concentration in the sterilization zone 3. A first control unit 30 receives
5 signals from the ambient temperature sensor 27, the relative humidity sensor 28 and the concentration meter 29 and regulates the amount of hydrogen peroxide added in production of the sterilizing gas. During machine
10 sterilization, the data from the temperature sensor 27, relative humidity sensor 28 and the concentration meter 29 are used for regulating the amount of hydrogen peroxide added to the air stream in the gas production unit 25. In this manner, optimal conditions may be
15 achieved for machine sterilization. During package sterilization, when the hydrogen peroxide concentration of the sterilizing gas is normally significantly higher than during machine sterilization, the relative humidity outside the device 1 is not as important, and therefore
20 only the ambient temperature sensor 27 and the concentration meter 29 are used for regulating the hydrogen peroxide amount added in the gas production unit 25. In this manner, the killing efficiency of the gas may be controlled for purposes of package sterilization.

In the second control loop, a package start temperature sensor 31 is used for measuring the temperature of
25 the packages 8 before entering the device and a package heating temperature sensor 32 is used for measuring the temperature of the packages 8 just before they leave the heating zone 2. Signals from these two temperature
30 sensors 31, 32 are sent to a second control unit 33 which regulates the temperature of the hot air introduced in the heating zone 2 for heating the packages 8 to the required temperature above the dew point of the sterilizing gas. Thus, a correct temperature of the
35 packages 8 may be ensured before they enter the sterilization zone 3.

In the third control loop, a condensation detector 34 detects possible occurrence of condensation in the sterilization zone 3. A signal from the condensation detector 34 is sent to a third control unit 35. If
 5 condensation is detected, a signal is sent from the third control unit 35 and used for controlling the temperature and/or flow of hot air in the gas production unit 25. Thus, the temperature of the sterilizing gas and/or the hydrogen peroxide content may be adjusted, such that
 10 condensation is avoided. Further, if condensation has been detected, it is possible to mark or discard the packages concerned.

The skilled person will realise that a number of modifications of the invention described above are
 15 possible without departing from the scope of the invention as defined in the appended claims.

For instance, only the first of the three control loops described above could be used, or the first control loop could be used in combination with one of the two
 20 other control loops.

This first control loop may also be supplemented with a flow meter (not shown) measuring the air flow to the gas production unit connected to the first control unit 30. If the flow of air into the gas production unit
 25 25, and thereby into the sterilization chamber 3, is reduced, e.g. if a filter in the air duct is clogged, the hydrogen peroxide concentration in the sterilizing gas and thus in the sterilization chamber 3 will rise. The first control loop would in such case regulate the amount
 30 of hydrogen peroxide added in gas production downwards. However, this may lead to too small a gas flow, so that not all parts of the packages are reached by the sterilizing gas. Therefore, the first control unit 30 may be arranged to sound an alarm at a predetermined low-
 35 level flow, so that the low flow may be corrected instead of just lowering the amount of hydrogen peroxide added in

the sterilizing gas. Similarly, an alarm signal may be sent at a predetermined high-level flow.

Other means of controlling the heating in the heating zone 2 may also be used. The ambient temperature
5 sensor 27 may be used for determining the temperature outside the device 1. With knowledge of the properties of the materials in the package 8, the required temperature and flow of hot air introduced through the nozzles 13 may be calculated. This may also be combined with the package
10 heating temperature sensor 32 described above for better control and for providing a safety feature.

The package heating temperature sensor 32 may be arranged in the holders 9 holding the packages for measuring the temperature of the packages 8 just before
15 they enter the sterilization zone 3. This temperature sensor 32 may be used for controlling the temperature and flow of the heating air as well as for controlling the safety shunt. It may also be combined with one or both of the previously described temperature sensors for allowing
20 even better control of the heating.

Other sterilizing agents than hydrogen peroxide may also be used, as long as they are suitable for sterilization in the gaseous phase.

CLAIMS

1. A device for sterilization in production of packages (8), which is adapted for sterilization with a gaseous sterilizing agent kept in the gaseous phase throughout the sterilization process, said device comprising a heating zone (2), a sterilization zone (3) and a venting zone (4), characterised in that it further comprises an ambient temperature sensor (27) for sensing the ambient temperature outside the device (1), a concentration meter (29) for measuring the concentration of sterilizing agent in the sterilization zone (3) and a first control unit for controlling the amount of sterilizing agent introduced in the sterilization zone (3) based on the temperature measured by the ambient temperature sensor (27) and the concentration measured by the concentration meter (29).

2. A device as claimed in claim 1, further comprising a package start temperature sensor for sensing the temperature of the packages (8) entering the heating zone (2).

3. A device as claimed in claim 1 or 2, further comprising a package heating temperature sensor for sensing the temperature of the packages (8) before entry into the sterilization zone (3).

4. A device as claimed in any one of claims 1-3, further comprising a feedback circuit for controlling the heating in the heating zone (2) based on the temperature of the packages (8).

5. A device as claimed in any one of the preceding claims, further comprising a condensation detector (34) for detecting condensation in the sterilization zone (3).

6. A device as claimed in any one of the preceding claims, further comprising means for maintaining a higher pressure in the sterilization zone (3) than in the heating zone (2) and venting zone (4).

7. A device as claimed in any one of the preceding claims, wherein said zones (2, 3, 4) are separated from each other by means of partitionings (6, 7) having openings (6a, 7a) for the passage of packages (8).

5 8. A device as claimed in any one of the preceding claims, which is adapted for sterilization with a gaseous sterilizing agent in the form of gaseous hydrogen peroxide.

10 9. A device as claimed in any one of the preceding claims, which is adapted to sterilize packages (8) before filling of the packages (8), said packages (8) having an open end (11) and a closed end (12).

15 10. A device as claimed in claim 9, wherein the heating zone (2) comprises means (13) for heating the packages (8) to a temperature above a dew point of the sterilizing agent used in the sterilization zone (3).

20 11. A device as claimed in claim 9 or 10, wherein the venting zone (4) comprises means (21, 24) for venting away the sterilizing agent used in the sterilization zone (3) from the packages (8) after sterilization.

25 12. A device as claimed in any one of claims 9-11, further comprising means (17, 20) for controlling a flow of gaseous sterilizing agent in the sterilization zone (3), such that the gaseous sterilizing agent flows essentially in a direction from the open end (11) of the packages (8) towards the closed end (12) of the packages (8).

30 13. A device as claimed in claim 12, wherein the means (17, 20) for controlling the flow of gaseous sterilizing agent are arranged to introduce the gaseous sterilizing agent in a top portion (18) of the sterilization zone (3) and to evacuate the gaseous sterilizing agent in a bottom portion (19) of the sterilization zone (3), maintaining a flow of gaseous
35 sterilizing agent essentially from top to bottom.

14. A device as claimed in any one of claims 9-13 further comprising means (21, 24) for controlling a

venting air flow in the venting zone (4), such that the venting air flows essentially in a direction from the open end (11) of the packages (8) towards the closed end (12) of the packages (8).

5 15. A device as claimed in claim 14, wherein the means (21, 24) for controlling the flow of venting air are arranged to introduce the venting air in a top portion (22) of the venting zone (4) and to evacuate the venting air in a bottom portion (23) of the venting zone
10 (4), maintaining a flow of venting air essentially from top to bottom.

16. A device as claimed in any one of claims 1-8, which is adapted to sterilize itself (1) internally.

17. A device as claimed in claim 16, further
15 comprising means (13) for heating the interior of the device (1).

18. A device as claimed in any one of the preceding claims, comprising a unit (25) for production of the gaseous sterilizing agent.

20 19. A device as claimed in any one of the preceding claims, further comprising a filling zone (5) for filling packages (8), and means for maintaining a higher pressure in the filling zone (5) than in the venting zone (4).

20. A method of sterilizing packages (8) in
25 production of the packages (8), said packages (8) having an open end (11) and a closed end (12), wherein a gaseous sterilizing agent is used and kept in the gaseous phase throughout the sterilization process c h a r a c t e r -
i s e d i n that an ambient temperature and a
30 concentration of sterilizing agent in a sterilization zone (3) where sterilization is performed are measured and used for controlling the amount of sterilizing agent introduced in the sterilization zone (3) .

21. A method as claimed in claim 20, wherein an
35 ambient temperature is measured and used for controlling the heating in a heating zone (2) where heating of the packages (8) is performed.

22. A method as claimed in claim 20 or 21, wherein a temperature of the packages (8) entering the heating zone (2) is measured and used for controlling the heating in the heating zone (2).

5 23. A method as claimed in any one of claims 20-22, a temperature of the packages (8) just before they are passed into the sterilization zone (3) is measured and used for controlling the heating in the heating zone (2).

10 24. A method as claimed in any one of claims 20-23, wherein a positive pressure is maintained in the sterilization zone (3) in which the sterilization is performed.

15 25. A method as claimed in any one of claims 20-24, wherein the packages (8) are passed into the heating zone (2) where they are heated to a temperature above the dew point of the sterilizing agent.

20 26. A method as claimed in claim 25, wherein the heated packages (8) are passed through an opening (6a) in a partitioning (6) separating the heating zone (2) and the sterilization zone (3) into the sterilization zone (3), where they are subjected to the gaseous sterilizing agent.

25 27. A method as claimed in claim 26, wherein the sterilized packages (8) are passed through an opening (7a) in a partitioning (7) separating the sterilization zone (3) and a venting zone (4) into the venting zone (4), where they are subjected to hot sterile air for venting away the sterilizing agent.

30 28. A method as claimed in claim 26 or 27, wherein the gaseous sterilizing agent in the sterilization zone (3) flows essentially in a direction from the open end (11) of the packages (8) towards the closed end (12) of the packages (8).

35 29. A method as claimed in claim 28, wherein the gaseous sterilizing agent is introduced in a top portion (18) of the sterilization zone (3) and evacuated in a bottom portion (19) of the sterilization zone (8), so

that a flow of sterilizing agent essentially from top to bottom is maintained.

30. A method as claimed in any one of claims 27-29, wherein the venting air in the venting zone (4) flows
5 essentially in a direction from the open end (11) of the packages (8) towards the closed end (12) of the packages (8).

31. A method as claimed in claim 30, wherein the
10 venting air is introduced in a top portion (22) of the venting zone (4) and evacuated in a bottom portion (23) of the venting zone (4), so that an air flow essentially from top to bottom is maintained.

32. A method as claimed in any one of claims 20-31, wherein the gaseous sterilizing agent is produced by
15 addition of liquid sterilizing agent to hot air.

33. A method as claimed in claim 32, wherein the
temperature and flow of air for production of the gaseous sterilizing agent is controlled based on detection of
condensation in the sterilization zone (3).

20 34. A method as claimed in any one of claims 20-33, wherein gaseous hydrogen peroxide is used as sterilizing agent.

35. A method as claimed in any one of claims 27-34, wherein a higher pressure is maintained in a filling zone
25 for filling vented packages than in the venting zone (4).

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30

ABSTRACT

A device (1) for sterilization in production of packages (8) is adapted for sterilization with a gaseous sterilizing agent kept in the gaseous phase throughout the sterilization process. The device (1) comprises a heating zone (2), a sterilization zone (3) and a venting zone (4). It further comprises an ambient temperature sensor (27) for sensing the ambient temperature outside the device (1), a concentration meter (29) for measuring the concentration of sterilizing agent in the sterilization zone (3) and a first control unit for controlling the amount of sterilizing agent introduced in the sterilization zone (3) based on the temperature measured by the ambient temperature sensor (27) and the concentration measured by the concentration meter (29). A method of sterilizing packages (8) in production of the packages (8) is also disclosed.

20

Elected for publication: Fig. 1

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

1/2

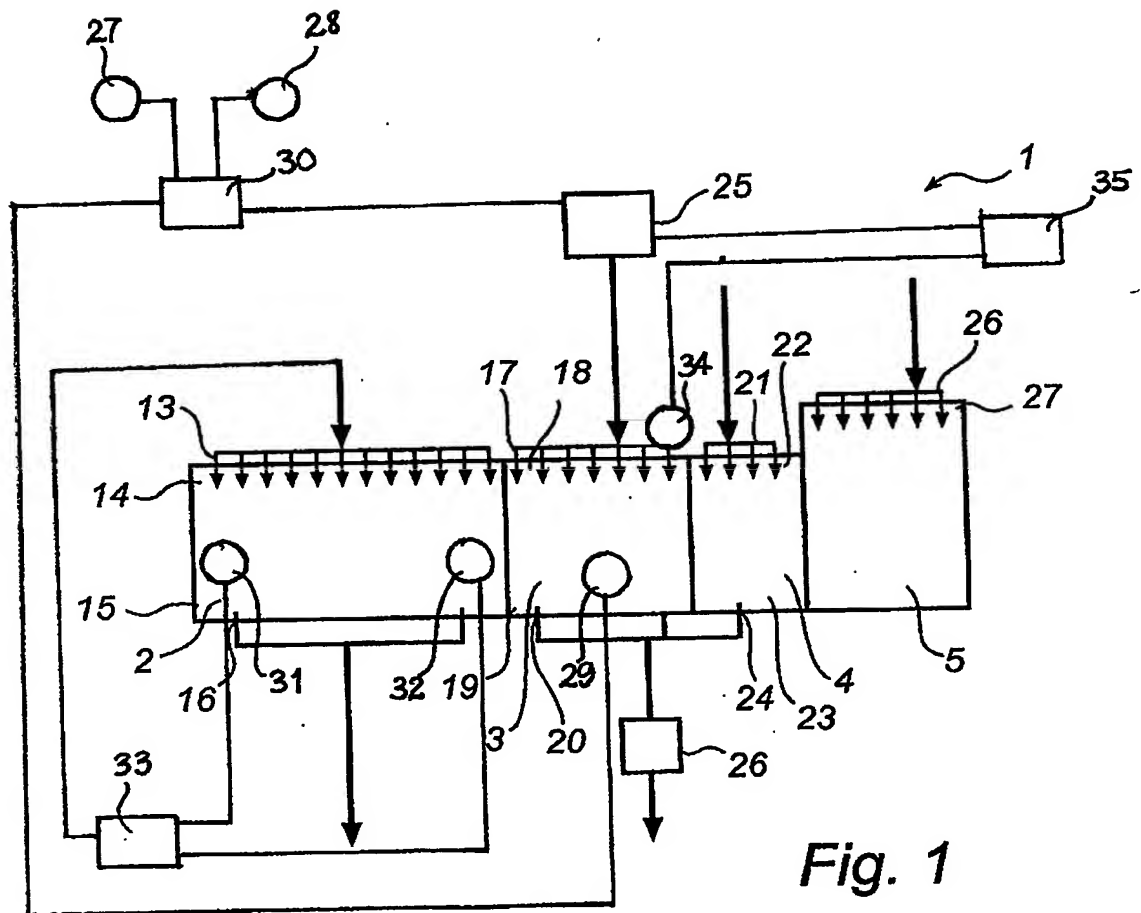


Fig. 1

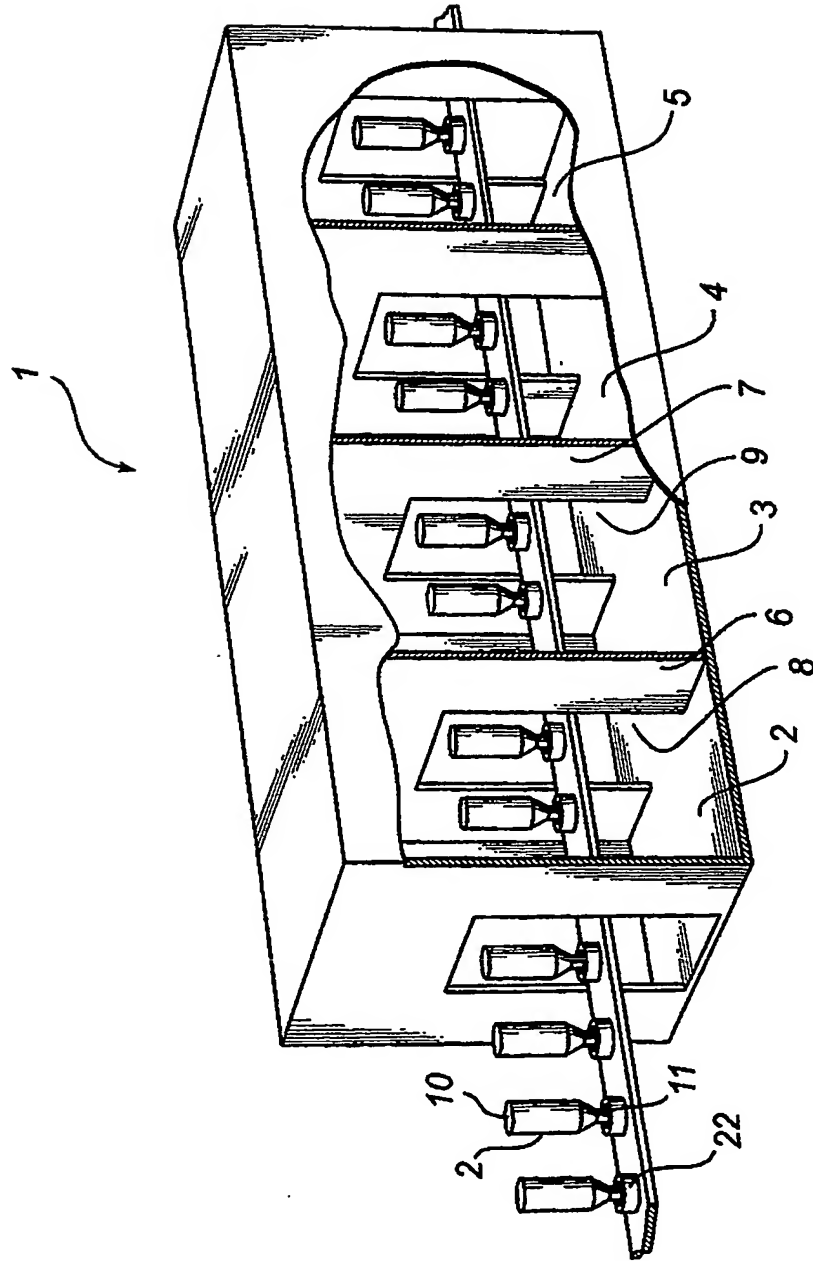


Fig. 2

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.